


确认图 (Drawings for approval)

设计标准 (DESIGN STANDARD)	BS 1868
结构长度 (FACE TO FACE)	ASME B16.10
连接形式 (CONNECTION TYPE)	ASME B16.5 FF
检查和试验标准 (INSPECTION & TESTING)	API 598

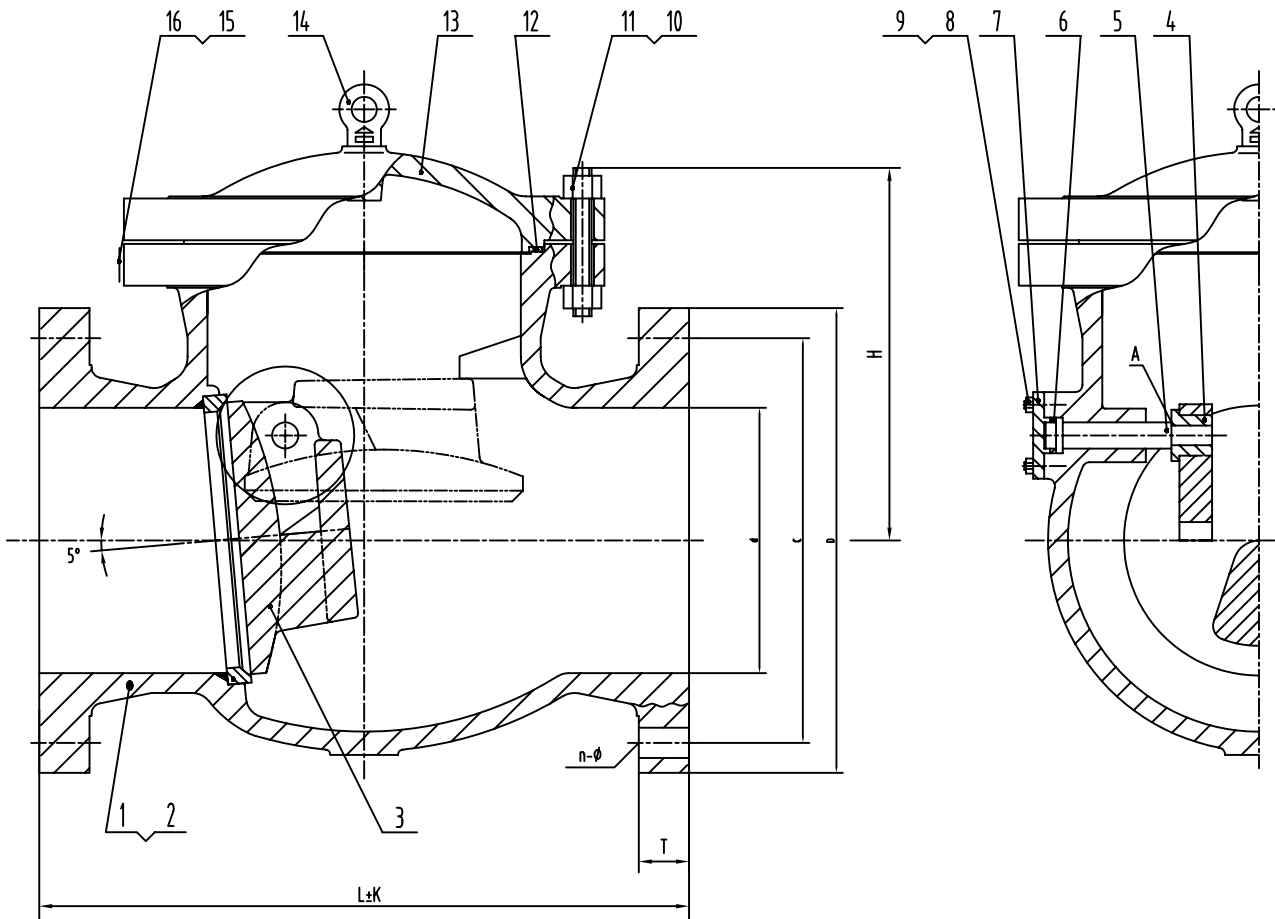

16"	387	540	597	37	864	3	16-29	426	375.7
8"	203	298.5	343	29	495	2	8-22	266	96.8
NPS	d	C	D	t	L	K	n-φ	H	重量 (Weight)

16	铆钉	Rivet	ASTM A276 321	
15	铭牌	Nameplate	ASTM A240 321	
14	吊环螺钉	Hook Screw	ASTM A29 1025	
13	阀盖	Bonnet	ASTM A351 CF3M	
12	垫片	Washer	Spiral Wounded Graphite+316L	
11	螺母	Nut	ASTM A194 8	
10	螺栓	Stud	ASTM A193 B8	
9	螺母	Nut	ASTM A194 8	
8	螺栓	Stud	ASTM A193 B8	
7	端盖	Cover	ASTM A182 F321	
6	填料	Packing	Flexible Graphite	
5	销轴	Hinge Pin	ASTM A276 316L	
4	轴套	Pin sheath	ASTM A276 316L	
3	阀瓣	Disc	ASTM A351 CF8M+STL6	
2	阀座	Seat Ring	ASTM A182 F316+STL6	
1	阀体	Body	ASTM A351 CF3M	
序号(No.)	名称(Name)		材料(Material)	备注(Remark)
2	张宏睿	2014.5.21		
1	吴丹	2014.4.24		
版次(Rev.)			变更内容描述(Change description)	
设计(DSIGNER)		审查(CHECKER)	日期 DATE	
公称压力 (NOMINAL PRESSURE)		150lb	公称通径 (NOMINAL SIZE)	8", 16"
止回阀(CHECK VALVE)			图号(DRAWING NO.)	HT1FA22L-TE(S)

阀门位号 (ITEM CODE) ITEM 59,75

中核苏阀科技实业股份有限公司 (SUFA TECHNOLOGY INDUSTRY Co.,LTD.CNNC)